



**ELEKTRONIK SYSTEM**

*Piotr Cieślinski*

ul. Ustronna 14  
89-606 Charzykowy

+48 608 34 34 34  
elektron@metaldetektor.pl

## II LAMP X-RAY SCANNER ELEKTRON-SXRF-2080II

➤ Dual-beam product scanning technology using two lamps directed at an angle. Intended, among others, for products in jars, cans, bottles, etc.


➤ Thanks to the x-ray of the product with two different angles system eliminates dead spots are irregular the edges of the packaging e.g. a glass jar or bottle.

➤ Ability to create several independent detection areas for selected product zones (e.g. top, middle or bottom of the product).



Model	<b>ELEKTRON-SXRF</b>
Two X-Ray lamps	MAX. 480W/120kV
Maximum width of the tested product	200 mm
Maximum height of the tested product	250 mm
The smallest possible detectable testers	Steel ball from 0.5 mm Steel wire from 0.3*2mm Glass/Ceramic ball from 1.5 mm
Transporter speed	10-60 m/min
Operating system	Windows 7
Radiation protection	Protective tunnel
External radiation	< 0.5 µSv/h
Tightness class	IP66
Working temperature	From -10 to +40 °C
Working humidity	30~90%
Cooling	PFANNENBERG industrial air conditioner
Recoil system	Pusher
Air pressure	0.6 - 0.8 Mpa
Power	3.5 kW
Material	Glass-blasted stainless steel

# LAMP SETTING DIAGRAM

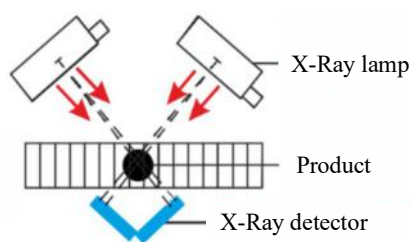

Technological connection of two beams researching the product ensures high detection level.

## MAIN FEATURES

- 24/7 remote technical support regardless of its location.
- The touch screen enables easy operation and management of functions (possibility to specify manual parameter settings, which guarantees the highest level of detection).
- Detection of glass in glass (bottles, jars) and metals in metal packaging (cans).
- Smooth management of each detection zone to improve the level and quality of scanning.
- Full range product inspection possible.
- Intuitive and very simple operation of the device.
- The highest possible level of detection and unprecedented stability of work when scanning products of various shapes entering irregularly and even drifting.

## SYSTEM FUNCTIONS

- Two levels of access to the program protected by a password.
- The operator has the ability to fully adjust the settings.
- Detection of defective products with damage (deformed product, crumpled can, missing or defective product).
- Possibility of cooperation with any separator.
- System of automatic diagnostics and security control (detection of open inspection door on the device and immediately stop the device and turn it off X-ray lamp radiation).


## LIST OF COMPONENTS

FUNCTION	NAME	PRODUCER
X-Ray source	X-Ray generator	VJ USA
X-Ray receiver	X-Ray detector	DT FINLANDIA
Device management	17 "touch monitor	iEi
Data processing	Industrial computer	TANK 820
Temperature and humidity control	Air conditioner	PFANNENBERG
Conveyor belt drive	Gear motor	ORIENTAL MOTOR
Speed regulation	Inverter	YASKAWA/OMRON
Electric protection	Miniature circuit breakers	SCHNEIDER ELECTRIC /ABB
Connection between devices	Military connectors	PLT
Safety management	Limit switches	OMRON
Automation management	PLC driver	OMRON
Warning information	Optical-acoustic indicator	SCHNEIDER ELECTRIC

## "FROST" SYSTEM

The X-Ray scanner can be equipped with an unprecedented system "FROST" with built-in intelligent heating system and thermostat, inside the panel which protects the internal electronics from moisture and cold. It is the only protection against rapid temperature changes during washing and protects against inward absorption of moisture (e.g. a cold machine being washed with hot water).

## TECHNICAL DRAWING OF ELEKTRON-SXRF-2080II

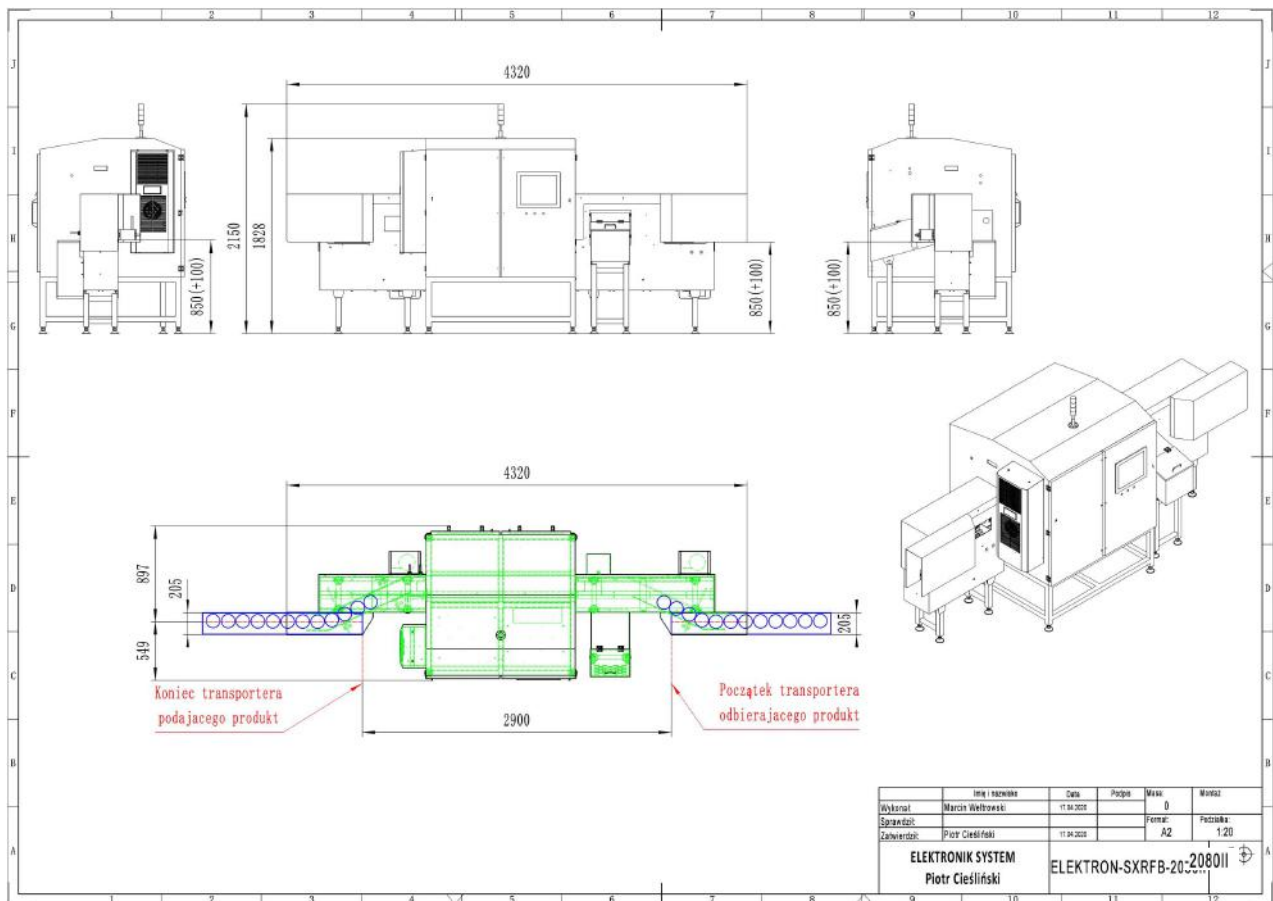

## OUR REALIZATIONS

