


A NEW GENERATION X-RAY SCANNER **ELEKTRON-SXRF 4080** WITH AUTOMATIC SEPARATOR

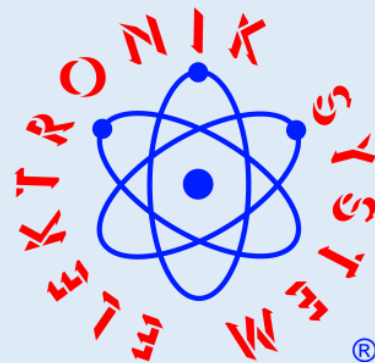

Ustronna 14
89-606 Charzykowy

wykrywaczmetali@onet.eu
elektron@metaldetektor.pl

+48 608 34 34 34



PRINCIPLE OF OPERATION

Purpose

ELEKTRON-SXRF It is designed for testing products in cardboard, plastic, PET, PE, vacuum, metallized, aluminum, glass and metal flat cans.


ELEKTRON-SXRF with an automatic separator, it is used to detect foreign bodies in the form of particles of all metals, bones, stones, glass, hard plastic and even rubber. The scanner is equipped with an automatic separator, which enables easy and quick elimination of contaminated products from the production line. The device is used to control beef, pork and poultry meat, cold cuts, fish, seafood, dried fruits, packaged coffee, sweets - for example, candies, spices, etc.

ELEKTRON-SXRF has been designed so that it can work with products packed in metallized foil, aluminum foil and low metal cans. Our X-Ray scanners are able to detect particles of foreign bodies even from Φ 0.4 mm, which makes them one of the best scanners in the world.

„FROST” SYSTEM

The X-Ray scanner can be equipped with the "FROST" system, unparalleled in other devices, with a built-in intelligent heating and thermostat system, inside the control panel, which protects the internal electronics from moisture and cold. It is the only protection against sudden temperature changes during washing and prevents the absorption of moisture inside (for example, a cold machine washed with hot water).

TECHNICAL DRAWINGS

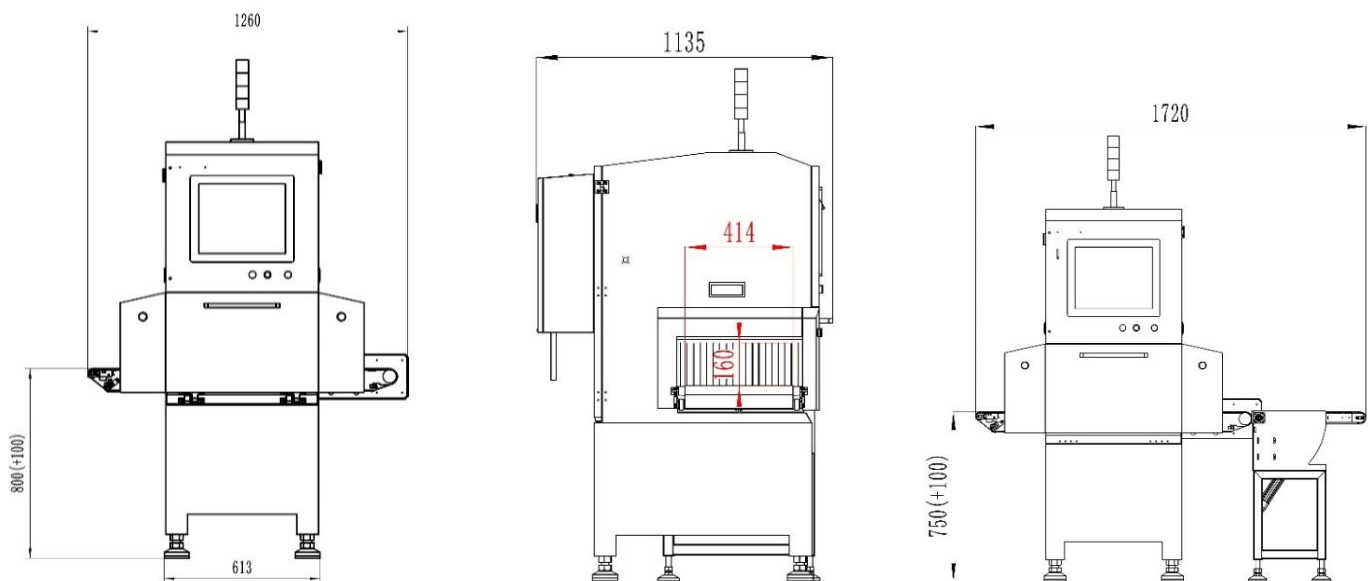

DESTINY

- Loose products packed, e.g. sugar, groats, dried fruit, rice, coffee, nuts, spices and the like,
- Pickled products, e.g. sauerkraut, pickled cucumbers, salads and vegetable pickles and many others,
- Low metal canned products e.g. fish, canned food, corn, peas, beans, pineapple, peach and the like
- Meat, e.g. chicken fillet, served loose or packed

SPECIFICATION

- **Permit by the President of the National Atomic Energy Agency No. D-17869.**
- Single beam product scanning technology with one top down lamp.
- High level of detection and stability of work when scanning products fed linearly and, which is unusual, entering drifting
- High level of security.
- Easy-to-use intuitive menu
- technical support and remote assistance via an internet connection
- Efficient and quick disassembly of the conveyor belt for cleaning.
- Menu in Polish and English (standard).

SYSTEM FUNCTION


- Detection of glass in glass (jars, bottles) and metals in metal packaging (cans).
- Automatic detection of missing product in the package.
- Unique, full-range, multi-layer product control system.
- Smooth management of each detection zone increasing the level and quality of scanning.
- Password protected system levels.
- A wide range of parameter adjustments enable the system to detect bone.
- Automatic warning system about the current state of the X-Ray scanner..
- Automatic highlighting of pollution with a color corresponding to the assigned algorithm.
- Ability to save the report in an .xls file, so you can open the report on a private computer using Excel.
- Automatic saving of the defective product, possibility to save the selected photo to an external data carrier.
- Seven times the image to identify contamination.

LIST OF COMPONENTS

FUNCTION	NAZWA	PRODUCENT
X-ray source	X-ray generator	VJ USA
X-ray receiver	X-ray detector	DT FINLANDIA
Device management	„17 ”touch monitor	iEi
Data processing	Industrial computer	TANK 820
Internal communication	Card I/O	Adlink
Temperature and humidity control	Air conditioner	PFANNENBERG
Conveyor belt drive	Gear motor	ORIENTAL MOTOR
Speed regulation	Inverter	YASKAWA/OMRON
Electrical protections	switches	SCHNEIDER ELECTRIC /ABB
Electrical protections	Relays	LS KOREA
Electrical protections	Fuses	SCHNEIDER ELECTRIC
Connection between devices and power supply	Military connectors	PLT
Safety management	Limit switches	OMRON
Automation management	PLC driver	OMRON
Warning information	Optical-acoustic signaling device	SCHNEIDER ELECTRIC

TYPES OF SEPARATORS

Single separator

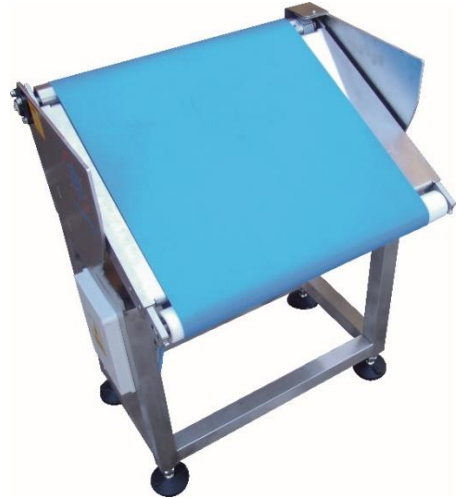

Double separator




Separator in the form of a falling conveyor



PARAMETERS

Model	ELEKTRON-SXRF
X-Ray Lamp	MAX. 80 kV, 350 W
Detector	LED 0,4 mm
The smallest detectable testers	Fe, NoFe, St/st balls from 0,4 mm, Wire St/st from 0,4 x 0,8 mm Glass/Ceramic balls from 1,0 mm
Belt speed	Adjustable in scope 0-60 m/min
Connection	LAN port, USB port
Product management	Automatic recording of the parameters of the tested product
Image management	Automatic image saving and analysis
Display	17 "touch screen
Cooling	Industrial air conditioner
Type of rejector	Pneumatic separator, 2-track (option)
Radiation protection	Protective tunnel and security system
Outside radiation	< 1 μ Su/h
Working temperature	from -10°C to 40 °C
Working humidity	30-90% % non-condensing water vaporise
Supply voltage	230 VAC
Power consumption	1200 W
Tightness class	IP66
Air pressure	6-8 bar
Main material	Stainless steel glass blasting

X-RAY SCANNER SELECTION

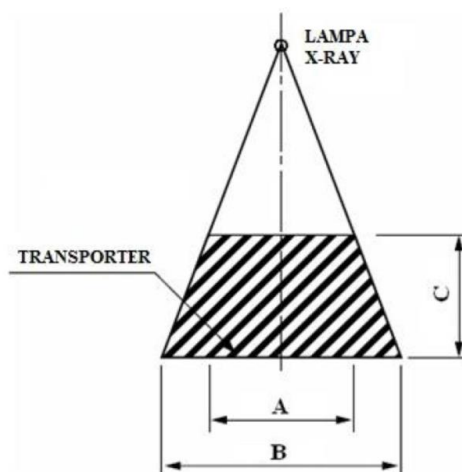

The type of X-Ray Scanner are selected according to the customers requirements. The product dimension must be entered in the detection cone according to the table below.

Model	SXRF-2080	SXRF-4080	SXRF-5080	SXRF-6080
Product height C	Product width B			
0 mm	240 mm	400 mm	500 mm	600 mm
10 mm	232 mm	388 mm	489 mm	589 mm
20 mm	224 mm	377 mm	477 mm	576 mm
30 mm	216 mm	365 mm	466 mm	564 mm
40 mm	208 mm	354 mm	455 mm	552 mm
50 mm	200 mm	342 mm	443 mm	540 mm
60 mm	192 mm	331 mm	432 mm	528 mm
70 mm	184 mm	320 mm	420 mm	515 mm
80 mm	180 mm	308 mm	409 mm	503 mm
90 mm	176 mm	297 mm	398 mm	490 mm
100 mm	172 mm	285 mm	386 mm	478 mm
110 mm	168 mm	274 mm	375 mm	466 mm
120 mm		263 mm	363 mm	454 mm
130 mm		251 mm	352 mm	441 mm
140 mm		240 mm	340 mm	429 mm
150 mm		228 mm	329 mm	417 mm
160 mm		218 mm	218 mm	405 mm
170 mm			307 mm	393 mm
180 mm			295 mm	380 mm
190 mm			284 mm	368 mm
200 mm			272 mm	356 mm
210 mm			261 mm	344 mm
220 mm			250 mm	331 mm
230 mm			239 mm	319 mm
240 mm			227 mm	307 mm
250 mm			216 mm	295 mm
260 mm				282 mm
280 mm				258 mm
300 mm				233 mm